

# COMMERCIAL DOOR 2000

LIGHT DUTY COMMERCIAL GRADE DOOR

SERIES

## DBCI's Commercial Steel Curtain Roll-Up Door Solutions:

### 1900 Series (1950 Insulated)

- 26-gauge Grade E galvanized steel
- Low overhead solution

### 2000 Series (2250 Insulated)

- 16-gauge galvanized steel drums with steel ball bearings
- 26-gauge Grade E galvanized steel

### 2500 Series (2750 Insulated)

- Heavy duty
- 10-gauge steel slide bolt lock
- Width up to 18 feet

### 3000 Series (3250 Insulated)

- Moderate to high wind load
- 80 degree windlock design

### 5000 Series (5250 Insulated)

- Aluminum bottom bar with steel angle reinforcement
- Wind-rated

The 2000 Series is the perfect door for light duty applications that require frequent use. These low-maintenance doors are ideal for warehouses, car washes, machine shops, auto body shops, and more. DBCI's commercial-grade steel curtains are designed to meet or exceed operational requirements, and the 16-gauge 12" drums are easy to retract and maintain.




Integrity. Partnership. Quality.



## Curtain

- 26-gauge galvanized, Grade E hard steel
- 5/8" ribbed corrugation
- Maximum opening size of 12' x 18'
- Flexible wear strips




## Bottom Bar

- 6063 – T6 aluminum extrusion
- 2" x 1 1/2" 11-gauge galvanized steel angle
- Bulb astragal
- Stainless steel nuts and bolts



## Axle-Drum Assembly

- 1 5/16" O.D. steel axle, 14-gauge
- 11-gauge axle on doors over 10' wide
- Utilizes 12", 16-gauge drums
- Shielded steel ball bearings in drums
- Full top sheet



## A.C.E. Guide System

- 16-gauge galvanized steel
- Adjustable bolt on head stop
- Polyethylene wear strip
- Pre-punched for lock and attachment fasteners

## Hardware

- Saddle clamps with set fasteners
- 10-gauge slide locks; 2 per door
- 16-gauge step plates; 2 per door
- 1/4" steel angle T-bracket





## Technical Notes

- Doors up to 10' have 20" of headroom
- Doors 10' to 14' have 22" of headroom
- Doors over 14' have 24" of headroom
- Doors require up to 24" of vertical clearance and 10 1/2" of side room. Smaller doors may require less. For specific measurements, contact DBCI at 800.542.0501



## Options

- Insulated 2250 Series
- 1900 Series – low overhead option
- Chain hoist 4:1 reduction
- Vision panels (17" x 5")
- Top draft stop
- Side draft stop
- Hood
- Steel mounting plates
- Electric operator




**NOTE:** The 2000 is not rated for wind loads. Please see 2500, 3000 or 5000.




## Also available with insulation (2250 Series)


### INTERIOR ELEVATION

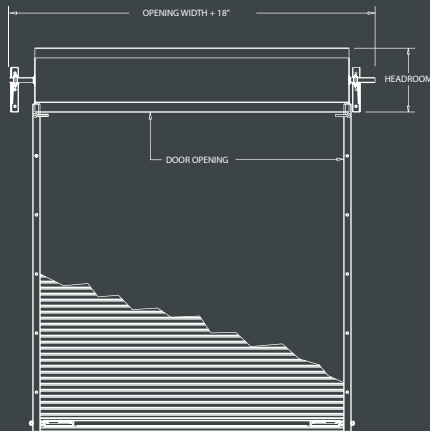


### GUIDE DETAIL



### DOOR ENGAGEMENT



### GUIDE MOUNTING

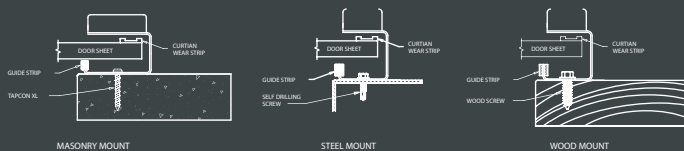

### INSULATED DOOR DETAIL

